

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number  
**WO 2005/041627 A3**

(51) International Patent Classification<sup>7</sup>: **H05K 7/20**,  
H01L 23/473, F28F 3/12

Kristen [DK/DK]; Vissingsgade 34, DK-6400 Sønderborg (DK).

(21) International Application Number:  
PCT/DK2004/000736

(74) Agent: **NISSEN, Georg**; c/o Danfoss A/S, Patent Department, DK-6430 Nordborg (DK).

(22) International Filing Date: 26 October 2004 (26.10.2004)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PA 2003 01576 27 October 2003 (27.10.2003) DK

(71) Applicant (for all designated States except US): **DAN-FOSS SILICON POWER GMBH [DE/DE]**; Heinrich-Hertz-Strasse 2, D-24837 Schleswig (DE).


(72) Inventor; and

(75) Inventor/Applicant (for US only): **OLESEN, Klaus**,


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: FLOW DISTRIBUTING UNIT AND COOLING UNIT HAVING BYPASS FLOW

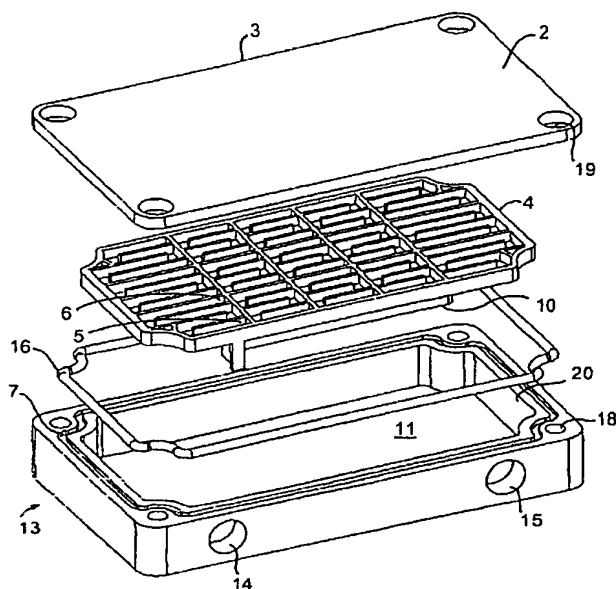

(57) Abstract: A cooling unit for cooling in particular power semiconductors contains a distributor for guiding liquid across a surface to be cooled. The distributor comprises an inlet manifold (8) and outlet manifold (9), whereby the inlet and outlet manifolds are connected through a flow cell, which has a main flow channel (50). The main channel is formed as a meandering sequence of channel segments (61, 62, 63, 64). It has been found, that the transfer of heat by the liquid in the main flow channel can be improved by introducing a bypass flow channel (71, 72, 73) which allows the flow of liquid from the cell inlet to the cell outlet, wherein the bypass flow channel interconnects the channel segments of the main flow channel.

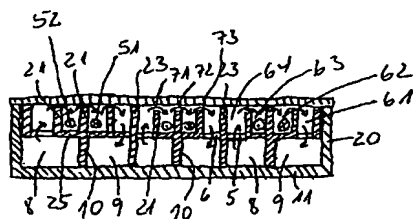



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:  
30 June 2005

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*